

TECHNICAL DATA SHEET

GEKKO G67

WATER BASED TACKIFIER



GEKKO G67 TACKIFIER ADHESIVE IS A WATER BASED, SPRAY GRADE PRESSURE SENSITIVE FLOORING ADHESIVE IN A CANISTER. GEKKO G67 CAN BE USED FOR CARPET TILE AND UNDERLAY TACKING APPLICATIONS AND ALLOWS THE CARPET TILES TO BE LAID INTO THE WET ADHESIVE BUT STILL WILL NOT GIVE A FULL BOND WHEN DRIED.

The unique portable, fully contained canister system allows you to stand up and apply the adhesive. This will reduce knee injury, reduce labour time and increase efficiency, resulting in increased profitability for the installer..

The versatility, portability and easy application control makes this a leading system in today's market.

BENEFITS:


- Water based adhesive
- Non flammable
- Quick drying with long open time.
- Portable system.
- Ergonomic
- No outside power source required
- Excellent adhesion on most types of carpet tiles
- 800 sprayed square metres coverage per 22ltr canister

SIZES AVAILABLE

- 13.7ltr canister
- 22ltr canister

TECHNICAL DATA:

Colour:	Clear
Flammability:	Non-flam propellant & water based adhesive
Dry time (minutes):	1-10 depending on atmospheric conditions
Open time:	1 hour
Coverage (sprayed):	800sqm per 22ltr canister

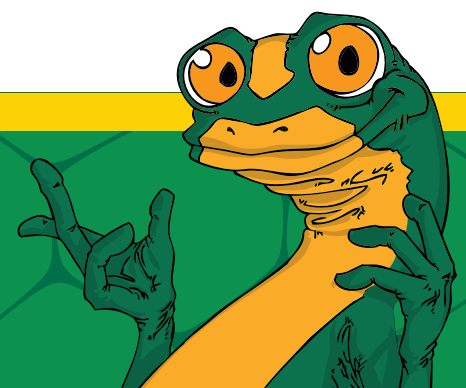

PREPARATION AND APPLICATION

Suitable subfloors include self-levelling compounds, plywood (underlayment grade), OSB Board, hardboard and existing non-cushion backed resilient floors (must be well bonded, sound, smooth and free of all waxes, finishes, strippers and cleaners). All paint varnish, oil, wax and any other finishes which may inhibit good bond should be removed. Repair all joints and cracks with a latex based levelling compound. Subfloors should be subject to 28 days of maturing and should have a maximum of 3% moisture content, or 70% relative humidity, before using this adhesive. For moisture contents between 3.1% and 7%, or over 70% relative humidity, a suitable primer and moisture barrier should be used. Do not use this adhesive above these recommendations.

Sub-floor preparation and moisture testing must comply with industry standards, and floor-covering manufacturer's guidelines. The floor and room temperature, as well as the flooring materials must be maintained in accordance with floor covering manufacturer's recommendations.

SHAKE WELL BEFORE USE. Hold spray gun at waist height and apply evenly across the floor. Do not allow it to concentrate or puddle in one area. Carpet tiles can be laid straight away but for best results leave adhesive to dry.

Disposal of canisters: please request disposal information.

LIMITATIONS

Always test Gekko G67 to determine suitability for your particular application prior to use in production.

HANDLING & STORAGE

Consult Material Safety Data Sheet prior to use

Do not store at temperatures over 50°C

Do not thin or reactivate with solvents

Do not incinerate

Keep away from sources of ignition

Test for suitability before use

Avoid exposure to direct sunlight

Do not store directly on concrete floor

For optimum performance, store at 18°C during use, but must always be done above 10°C

When connected, keep valve open and hose pressurised at all times.

Do not close valve until ready to connect to new cylinder

Release pressure in hose before disconnection

Always test Gekko G67 to determine suitability for your particular application prior to use in production.

MSDS & Technical Data Sheets must be read and understood before use.

DISCLAIMER: Due to the variation in materials likely to be handled by prospective users of this product, together with differences in production techniques and ultimate performance required, it is important that this product is thoroughly evaluated under production and end use conditions before being commercially adopted. Such an evaluation should incorporate an ageing test and this test should be repeated if the substrates on which the this product is used are changed in any way or are purchased from a different source. During the evaluation and testing of the product, it is the purchasers/end user's responsibility to carry out appropriate actions for the protection of the environment, the health and safety of its employees and purchasers of its products. No employee of Gekko Industries Ltd has any authority to waive or change the forgoing provisions. The above recommendations are made in good faith for the guidance of users and are without liability. Any queries should be made in writing to the head office of Gekko Industries Ltd.

Gekko Industries Ltd.

7 Flowers Hill, Brislington, Bristol BS4 5JJ UK

T: 0844 915 0159 F: 0844 915 0169

E: sales@gekko-adhesives.com

www.gekko-adhesives.com